



**aviation warning light**



**TCT**

Lightning Protection Inc.




## Single Warning Light




Lower Part Aluminium

## Double Warning Light

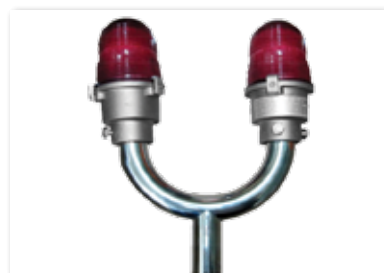

All products are classified as IP 67

## Variable Bracket For Obstruction Light

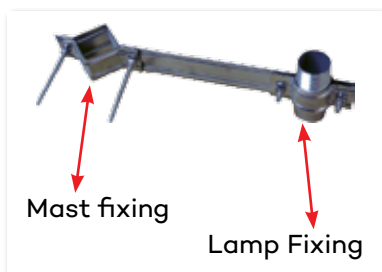

Code

Description

BFOL

Made of galvanized steel, available in sizes, up to 70x70 mm and or 3"

*Pls, Add Mode Code At Your Order*

WARNING LAMP MODES	DESCRIPTION	CODE
CONTINUOUS	LIGHT ON 24 HOURS	C
CONT. FLASH	FLASHING 24 HOURS	CF
CONT. NIGHT	LIGHT ON ONLY ALL NIGHT	CN
NIGHT FLASH	FLASHING ONLY ALL NIGHT	NF

POWER LED SPECS.		
Led No	3x1	2.(3x1)
Power (Watt)	3 W	3 W
Wave Length	620 - 630nm	
Luminous	min. 50 lumen / LED	
Operating Life	50.000 hour	

	WARNING LIGHT (Single)	WARNING LIGHT (Double)
Operating Voltages	48-250 V AC / DC	48-250 V AC / DC
	12-36 V AC / DC	12-36 V AC / DC
	12/24/48 V DC	12/24/48 V DC
Flashing Time	1 Hz.	
Selftesting Interval Time	max 15 min.	
Electrical Power	Max. 4 watt	
Mode	C, CF, CN, NF	
Monitoring	Dry Contacts: NO-NC	
NO		Led Fault
NC	No Power Supply	No Power Supply
UPPER PART	Clear Glass / Red Glass / Clear ABS	
LOWER PART	Aluminum	
SINGLE LAMP	Ø110 mm, H:220/160 mm	
Mast Diameter	42 mm, 1 <sub>1/4</sub> "	



[www.tctprotection.com](http://www.tctprotection.com)



**TCT**

Lightning Protection Inc.

- 📍 615-20 BURKEBROOK PLACE  
TORONTO ON M4G 0A1
- ☎ +1 647 667 7012
- ✉ [operation@tctprotection.com](mailto:operation@tctprotection.com)